


CLOCK ASSEMBLY MANUAL

ASSEMBLY STEPS

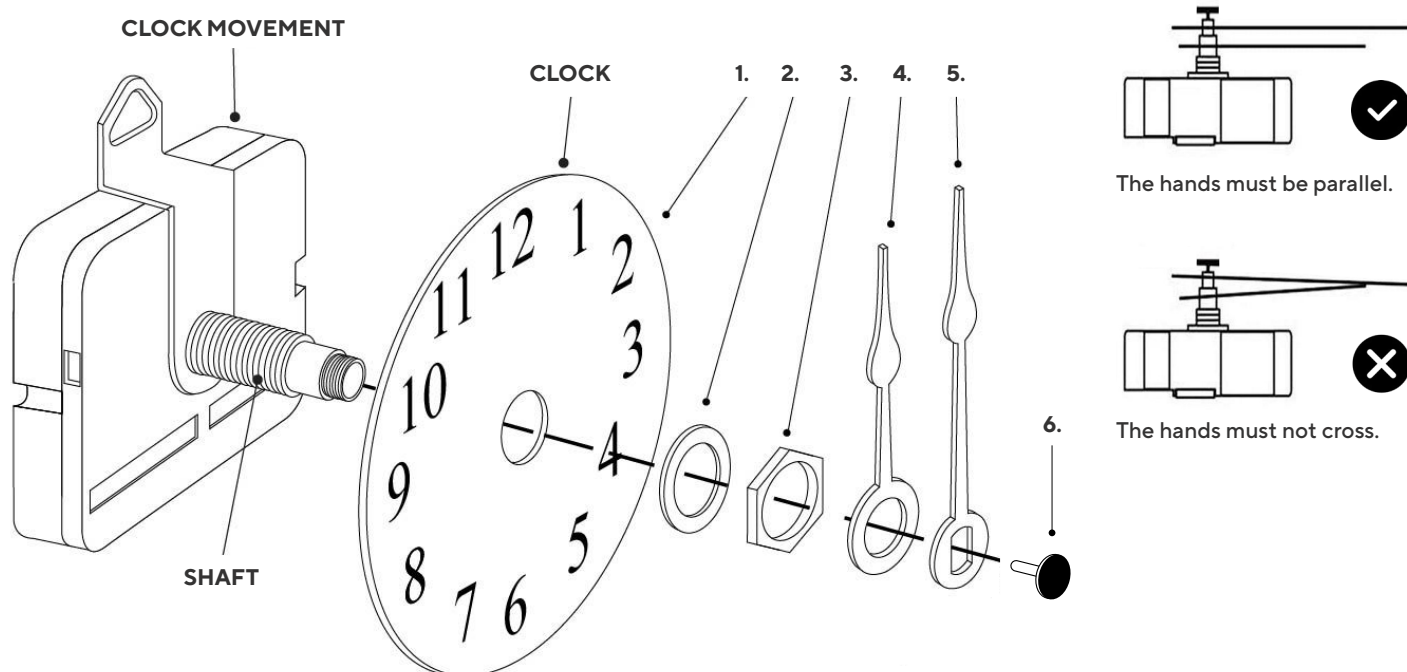

1. Insert the clock movement (shaft) through the clock face.
2. Slide the brass washer onto the shaft.
3. Screw on the hexagonal nut to secure the clock face.
4. Gently place the hour hand onto the shaft so that it points to 12:00.
5. Place the minute hand onto the shaft, also pointing to 12:00.
6. Carefully attach and press down the cover nut. Do not use excessive force, as this could damage the movement.

TIP: When attaching the cover nut, do not press on the shaft – it could be pushed inside the movement and cause it to malfunction. Always set the time using the wheel on the back of the clock movement. Never adjust the hands by moving them manually, as this could damage them or disturb the mechanism.